

# NULLA

Davide Groppi / 2010

An extreme expression of subtraction, uniting optics and electronics as an answer to the ultimate challenge: the absence of structural support and the essence of light.

Nulla is a project that represents both the beginning and end of our work on light.

It's the beginning, in the sense that we have always been looking for absolute light, one coming from a distance, almost without a source. It's the end in that every time we

look at Nulla, we feel as though we can't get it better than that.

Nulla generates light and propagates mystery. Nulla is the most generous of our lamps.

Its sole objective is to hide and give all the attention to whatever it is lighting.

What we see is only a tiny black hole, as if it were drawn on the ceiling.

A circle in the ceiling hiding a very bright LED and lens to project the light.

**XXIII Compasso d'Oro ADI Award, 2014**

Un lavoro estremo di sottrazione, che unisce elettronica e l'ottica verso la sfida finale:

l'assenza del supporto e l'essenza della luce.

Nulla è un progetto che rappresenta l'inizio e la fine del nostro lavoro sulla luce.

L'inizio perché da sempre cerchiamo la luce assoluta, quella che arriva da lontano,

quasi senza fonte. La fine perché ogni volta che guardiamo Nulla

ci sembra di non potere andare più avanti di così.

Nulla genera luce e diffonde mistero. È la più generosa delle nostre lampade,

quella che si nasconde al solo scopo di regalare la scena al soggetto illuminato.

Ciò che appare è solo un minuscolo buco nero, quasi disegnato.

Un foro nel soffitto, un LED potentissimo e una lente che generano la luce.

**Premio XXIII Premio Compasso d'Oro ADI, 2014**

Compasso d'Oro ADI  
Award 2014



Recessed / Direct / Indoor

**Material** Metal  
**Finish** .00 Standard


**Note** Recessed luminaire. Visible 18 / 25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance. *Apparecchio illuminante da incasso. Foro visibile con diametro da 18 / 25 mm. NULLA 18 e NULLA 25: apparecchio estraibile per manutenzione.*



**NULLA 18 - 20°**  
4,5W  
24V DC  
2700K - 174lm / 3000K - 186lm  
CRI >90  
Beam 20°  
UGR <19  
Driver not included  
CE IP20

Standard - 2700K  
Standard - 3000K

1A2010000.27.20  
1A2010000.30.20



**NULLA - 23°**  
14W  
24V DC  
2700K - 425lm / 3000K - 458lm  
CRI >90  
Beam 23°  
UGR <19  
Driver not included  
CE IP20/IP65

Standard - 2700K  
Standard - 3000K


1A4100000.27.20  
1A4100000.30.20



**NULLA 25 - 23°**  
9W  
24V DC  
2700K - 304lm / 3000K - 327lm  
CRI >90  
Beam 23°  
UGR <19  
Driver not included  
CE IP20/IP65

Standard - 2700K  
Standard - 3000K

1A4080000.27.20  
1A4080000.30.20



**NULLA - 32°**  
14W  
24V DC  
2700K - 538lm / 3000K - 579lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included  
CE IP20/IP65

Standard - 2700K  
Standard - 3000K

1A2110000.27.20  
1A2110000.30.20



**NULLA 25 - 32°**  
9W  
24V DC  
2700K - 384lm / 3000K - 413lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included  
CE IP20/IP65

Standard - 2700K  
Standard - 3000K


1A2020000.27.20  
1A2020000.30.20

**Compulsory accessories / Accessori obbligatori**


Installation kits / Kit d'installazione



<b>Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm</b>				Not included
Matt Black	Cut-out Ø 21 mm Minimum space for mounting 100 mm IP65	NULLA	1A2200400.00.00	



<b>Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm</b>				Not included
Matt Black	Cut-out Ø 22 mm Minimum space for mounting 190 mm	NULLA 18	1A2210400.00.00	



<b>Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm</b>				Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 190 mm	NULLA 25	1A2170400.00.00	




<b>Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm</b>				Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A3980400.00.00	




<b>Plasterboard flange (bottom) ≠ 12,5 mm / Flangia (da sotto) per cartongesso ≠ 12,5 mm</b>				Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A4960400.00.00	


**Drivers / Alimentatori**



<b>Driver / Alimentatore</b>			Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI		1Z0241180.24



<b>Driver / Alimentatore</b>			Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH		1Z0240870.24




<b>Driver / Alimentatore</b>			Not included
220-240V	24V/20W/IP20/TRIAC/IGBT		1Z0240850.24

**Optional accessories / Accessori opzionali**


Installation kits / Kit d'installazione




<b>Trapdoor for plasterboard 12,5 mm / Botola per cartongesso 12,5 mm</b>				Not included
Standard	Cut-out 205x205 mm	NULLA	1A3780000.00.00	




<b>Trapdoor for plasterboard 12,5 mm / Botola per cartongesso 12,5 mm</b>				Not included
Standard	Cut-out 415x415 mm	NULLA	1A3790000.00.00	




<b>Masonry Box / Cassaforma per laterizio</b>				Not included
Standard		NULLA 18	1A2390000.00.00	




<b>Concrete box / Cassaforma per cemento</b>				Not included
Standard		NULLA 18	1A2240000.00.00	



<b>Masonry Box / Cassaforma per laterizio</b>				Not included
Standard		NULLA 25	1A2380000.00.00	




<b>Concrete box / Cassaforma per cemento</b>				Not included
Standard		NULLA 25	1A2230000.00.00	

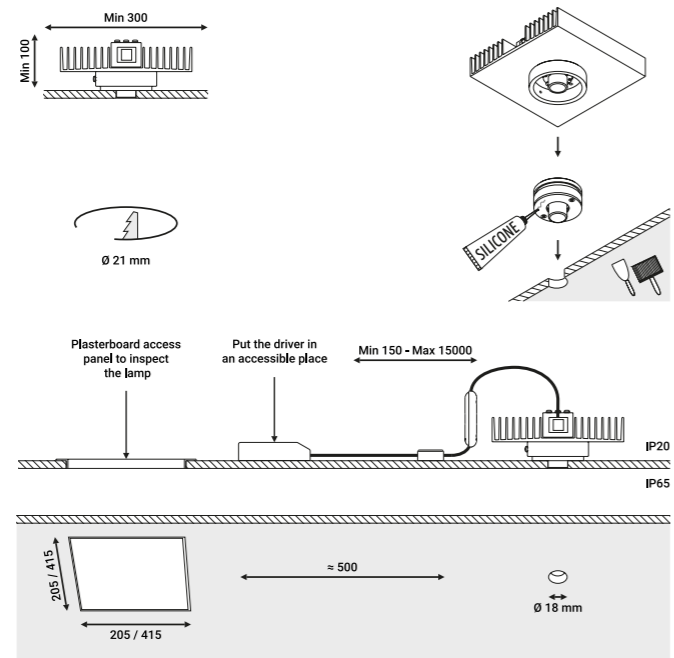


NULLA installation conditions

The sizes are expressed in millimeters.

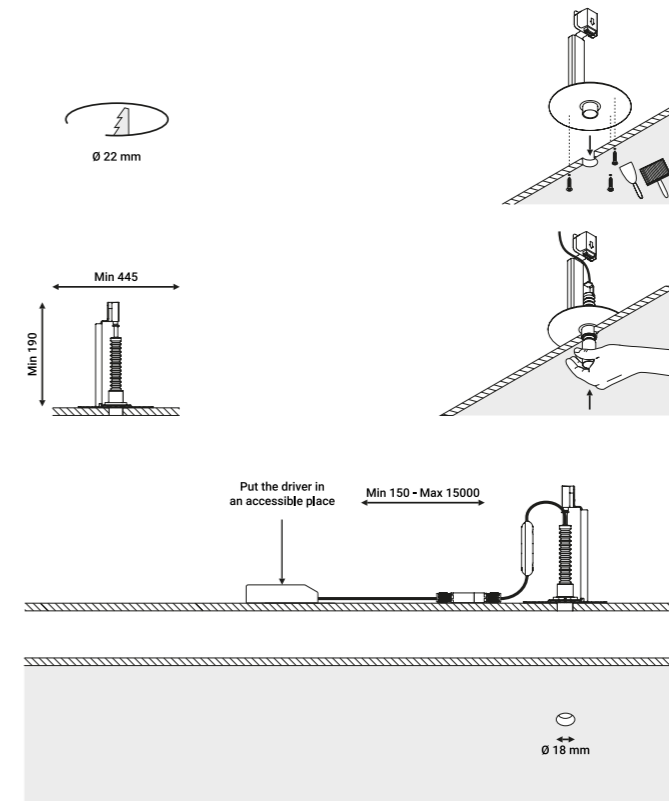

NULLA 18 installation conditions

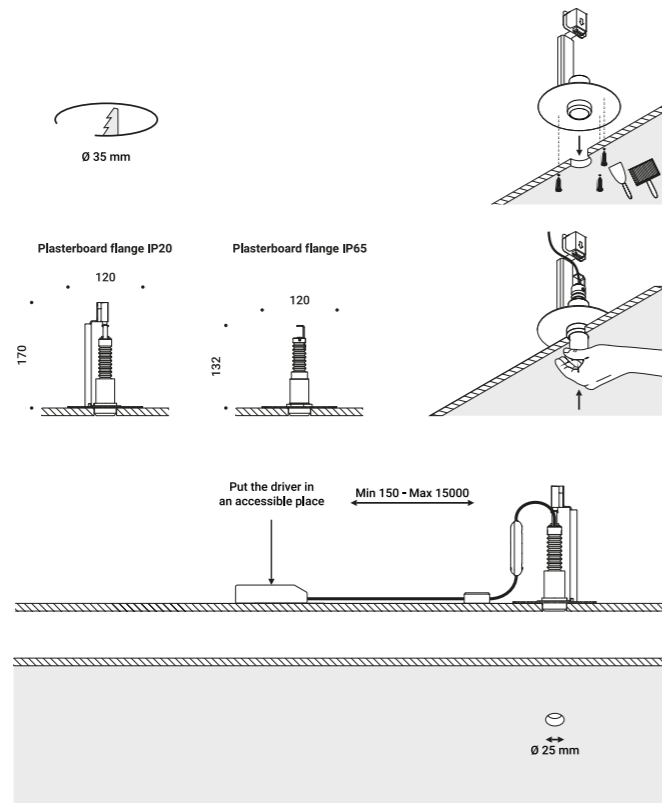

NULLA 25 installation conditions

